


**CHECK VALVE CAST CARBON, STAINLESS STEEL OR ALLOY STEEL
2" TO 16" (50 TO 400 mm) ASME CLASSES 600 TO 2500**

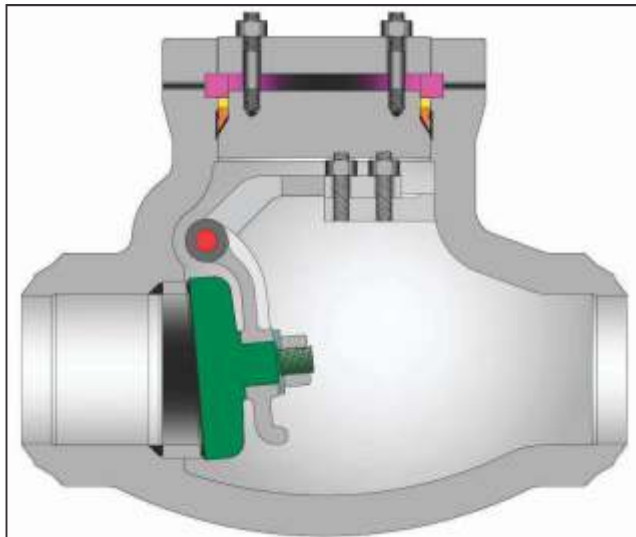

Class	Figure Number
600	1661
900	1961
1500	1161
2500	1261

Design Specifications

Item	Applicable Specification
Wall thickness	API 600
Pressure - temperature ratings	ASME B16.34
General valve design	ASME B16.34
End to End dimensions	ASME B16.10
Flange design	ASME B16.5
Butt Weld design	ASME B16.25
Materials	ASTM

DESIGN FEATURES:

Standard trim is stellite faced seat and disc seat surfaces, and 13% chrome carrier pin (API trim 5). Other trims available on request.

Valves are full port design per ASME B16.34 table A-1.

Seat faces lapped for smooth finish and superior sealing.

Wall thickness per heavy wall API 600 requirements.

Swivel disc for improved seat alignment and longer life.

Each valve is shell and seat pressure tested per industry standard API 598.

Check valves are suitable for service in horizontal line with cap vertical or in a vertical line with flow upward.

Carrier Pin is confined within the body wall and is not accessible from the exterior, thus no side body penetrations, eliminating a common leak path.

STANDARD MATERIALS (Other materials available)

PART	MATERIALS			
Body	A216 Gr. WCB	A217 Gr. WC6	A217 Gr. WC9	A217 Gr. C12A
Bonnet	A105	A182 F11	A182 F22	A182 F91
Cap	A216 Gr. WCB	A217 Gr. WC6	A217 Gr. WC9	A217 Gr. C12A
Disc	A105 or A216 WCB + Stellite 6 Faced	A182 F11 or A217 WC6 + Stellite 6 Faced	A182 F22 or A217 WC9 + Stellite 6 Faced	A182 F91 or A217 Gr. C12A + Stellite 6 Faced
Seat Ring	Carbon Steel + Stellite 6 Faced	A182 F11 + Stellite 6 Faced	A182 F22 + Stellite 6 Faced	A182 F91 + Stellite 6 Faced
Protective Ring	SST 410			
Segmental Thrust Ring	SST 410			
Gasket	SST 304L			
Carrier	A216 Gr. WCB	A217 Gr. WC6	A217 Gr. WC9	A217 Gr. C12A
Carrier Pin	SST 410			
Disc Nut	Series 300 SST			
Disc Carrier Hanger	A216 Gr. WCB	A217 Gr. WC6	A217 Gr. WC9	A217 Gr. C12A
Disc Carrier Hanger Bolts	A193 Gr. B7	A193 Gr. B16		
Body / Cap Stud	A193 Gr. B7	A193 Gr. B16		
Body / Cap Nut	A194 Gr. 2H	A194 Gr. 7		

Weld end valves are B16.10 short pattern design. Flanged end valves are available on request and are B16.10 long-pattern design. Weld end valve dimensions given in table on next page.

Each valve has a unique certification number that is traceable to the valve certification sheet which includes MTR data, pressure test, inspection result and certificate of conformance.

Other available options as follows:

- Alternate valve materials such as chrome and stainless steel alloys
- Alternate trim materials
- Drain and other auxiliary connections
- NACE service
- Special cleaning for applications such as oxygen or chlorine
- Other options available as specified

**CHECK VALVE CAST CARBON, STAINLESS STEEL OR ALLOY STEEL
2" TO 16" (50 TO 400 mm) ASME CLASSES 600 TO 2500**

SWING CHECK VALVE DIMENSIONS (CLASS 600—2500).

SIZE	ASME 600			ASME 900			ASME 1500		
in	A	B	D	A	B	D	A	B	D
mm									
2	7.00	6.8	2.00	8.50	8.6	1.87	8.50	8.7	1.87
50	178	172	51	216	218	48	216	221	48
3	10.00	8.8	3.00	12.00	10.2	2.87	12.00	10.2	2.75
80	254	224	76	305	259	73	305	259	70
4	12.00	11.1	4.00	14.00	11.7	3.87	16.00	12.2	3.62
100	305	282	102	356	297	98	406	310	92
6	18.00	13.0	6.00	20.00	14.3	5.75	22.00	14.5	5.37
150	457	330	152	508	363	146	559	367	136
8	23.00	14.6	7.87	26.00	16.6	7.50	28.00	18.9	7.00
200	584	370	200	660	422	191	711	480	178
10	28.00	16.6	9.75	31.00	19.4	9.37	34.00	22.1	8.75
250	711	422	248	787	493	238	864	561	222

SIZE	ASME 2500		
in	A	B	D
mm			
2	11.00	9.6	1.50
50	279	244	38
3	14.50	12.4	2.25
80	368	316	57
4	18.00	14.5	2.87
100	457	367	73
6	24.00	16.0	4.37
150	610	408	111
8	30.00	20.1	5.75
200	762	510	146

B = Center to top

